
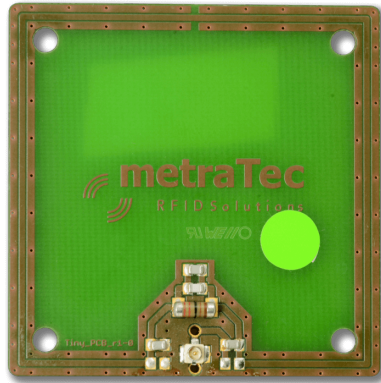


TinyPCB OEM RFID Antenna

Art. no.:
22001357

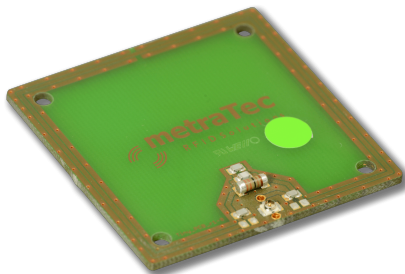

- 13.56 MHz RFID antenna
- up to 50mm read range
- U.FL connector

TinyPCB OEM RFID Antenna

The TinyPCB is a small RFID antenna for HF RFID at 13.56 MHz. With a size of 51 x 51 mm (2 x 2 inches), it can reach a read range of roughly 50 mm with the right RFID module and transponder.

Use this antenna with our Dwarf15 or Dwarf14 RFID modules to build a flexible identification solution. This antenna is part of the respective starter kits of those modules. Of course, the antenna can also be used with any other HF RFID module.



TinyPCB OEM RFID Antenna

Art. no.:
22001357



Technical Specification

Operating Principle	HF RFID Loop Antenna
Operating Frequency	13.56 MHz (worldwide)
Read Range	up to 50 mm
Antenna Connector	U.FL
Impedance	50 Ohm
Temperature Range	-40 Â°C to +85 Â°C
Dimensions	51 x 51 mm / 2 x 2 inch

About Metratec

Metratec develops, produces and sells Radio electronics for the areas of "Identification", "Localization", and "Communication" and thus serves a variety of markets with standard products as well special solutions. Customers include OEM customers, system integrators and research facilities worldwide.

Metratec GmbH
Niels-Bohr-Str. 5
39106 Magdeburg, Germany
T: +49 (0)391 251906-00
Mail: sales@metratec.com
www.metratec.com

US Office
Metratec USA
6 Liberty Square #2073
02109 Boston, MA, United States
T: +1 (857) 799-3795
Mail: us@metratec.com

